


ART15




SPECIFICATIONS

Best operating frequency: 15 kHz +/-0.5 kHz
Minimum Transmit Sensitivity at Best Transmit Frequency:
 123 dB re 1 μ Pa/V at 1 m
Minimum Receive Sensitivity at Best Receive Frequency:
 -148 dB re 1V/ μ Pa
Minimum Parallel Resistance @15kHz: 100 Ohm
Minimum and Maximum Sensing Range: 1-60 m
Beamwidth (@ -3 dB Full Angle): 6° +/-2°
Maximum Driving Voltage (2% Duty Cycle Tone Burst): 900 V_{pp}
Operating Temperature: -30°C to 60°C
Thermistor Operating Range: -20°C to 60°C
Weight: 2.6 lbs / 1.18 kg
Cable Length: 10 m
Housing Material: Aluminum, static dissipative Kynar, static dissipative PE
Acoustic Window: LDPE

Directivity Pattern



Transmit & Receive Voltage Response

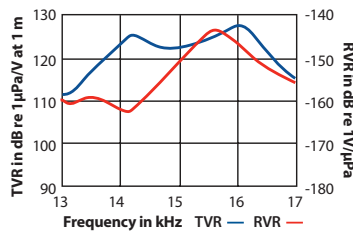

Impedance Magnitude & Phase


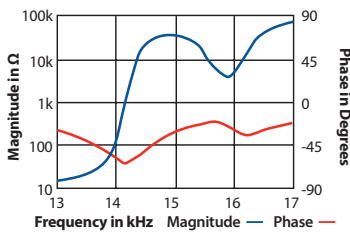


Figure of Merit (Sum of TVR & RVR)



15 kHz

AIRDUCER® Ultrasonic Transducer

Applications

- Silos
- Wells
- Wastewater facilities
- Large capacity tanks
- River crossings/bridges


Features

- Delivers long range level measurements up to 60 m (197')
- Extended range without the cost of radar
- Built-in thermistor

Options

- Cable length can be customized
- Also available without thermistor

Dimensions

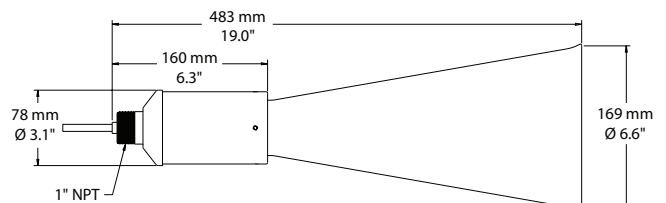

©Airmar Technology Corporation

ART15_rB 12/09/20

As Airmar constantly improves its products, all specifications are subject to change without notice. All specifications typical at 22°C. Factory Mutual approved models suitable for: Class I, Division 1, Hazardous Locations. AIRDUCER® is a registered trademark of Airmar Technology Corporation. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with Airmar. KYNAR® is a registered trademark of Arkema.