



ADA-Series Advanced Magnetic Switches

ADA-Series Advanced Magnetic Switch Sensors

Simplified Block Diagrams




ADA021




ADA32124

Magnetic Responses



ADA021



ADA32124

Features

- Ideal for cylinder position sensor applications
- Immune to double-switching
- Normal operation up to 1400 mT magnetic field
- Single- and dual-comparator open-drain switch outputs
- Cannot be damaged by large magnetic fields
- Ultraminiature 2.5 x 2.5 DFN6 or 3 x 3 mm MSOP8
- High-temperature operation up to 150 °C

Applications

- Pneumatic cylinder position sensing
- Proximity sensing
- Speed sensing
- Rotation sensing

Description

Using advanced sensing elements, ADA-Series magnetic switch sensors provide best-in-class performance and ruggedness.

The technology eliminates double switching artifacts in applications such as cylinder position sensing. Two-threshold versions can be used to detect speed and direction, regulate end-of-travel speed, or tune ultraprecise switching thresholds.

The robust parts have an extended -40 to 150 °C temperature range for harsh industrial environments and operate from 4.5 to 30-volt power supplies. The sensor elements can withstand magnetic fields up to 1400 mT without their operation being disturbed, making them immune to the effects of high external currents or strong motor magnets.

MSOP8 (-00E suffix) and DFN6 (-10E suffix) packages are available.

ADA-Series Advanced Magnetic Switches

Absolute Maximum Ratings

Parameter	Min.	Max.	Units
Supply voltage	-33	33	Volts
Output voltage	-0.5	33	Volts
Continuous output current		20	mA
Storage temperature	-65	150	°C
ESD ⁽¹⁾		2000	Volts
Applied magnetic field		Unlimited	Tesla ⁽²⁾

Operating Specifications

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Condition
Supply voltage	V_{DD}	4.5		30	Volts	
Operating temperature	$T_{MIN}; T_{MAX}$	-40		150	°C	
Out1 output operate point	H_{OP1}	1.8	2.0	2.5	mT	$V_{DD} = 10V;$ $T_{max}^{(3)} = 85\text{ °C}$
• ADA021		$H_{OP2} - 1.3$	2.0	$H_{OP2} - 0.6$		
• ADA32124						
Out2 output operate point ADA32124	H_{OP2}	2.1	2.8	3.3		
Out1 output release point	H_{REL1}	0.5	1.0	See note ⁽³⁾		
Out2 output release point	H_{REL2}	0.5	2.2			
Output hysteresis differential ⁽⁴⁾	H_{DIF1}, H_{DIF2}	0.1		1.3		
• ADA021		0.1		1.0		
• ADA32124						
Output release point						
Quiescent current	I_{DDQ}	2.5		5	mA	$V_{DD} = 10V;$ outputs off
• ADA021		2.5		10		
• ADA32124						
Maximum output drive current	I_{OL-ON}	20			mA	Per channel
Output low voltage	V_{OL}			0.4	V	$V_{DD} = 10V;$ $I_{OL-ON} = 20\text{ mA}$
Output leakage current	I_{OL-OFF}			40	μA	$V_{DD} = 10V$
Frequency response			100		kHz	


- Human Body Model (HBM) per JESD22-A114.
- 1 millitesla (mT) = 10^6 nanotesla (nT) = 10 Gauss (G) = 10 Oersted (Oe) in air.
- See temperature derating curve in Typical Performance Graph.
- $H_{DIF} = H_{OP} - H_{REL}$ = differential (also called switching hysteresis), which is the difference between the operate and release points.

ADA-Series Advanced Magnetic Switches

Dual-Output Operate/Release Sequence

The switching order of the two ADA32124 outputs is 100% tested and guaranteed. Output 2 always switches at a higher field magnitude than Output 1. There are two possibilities:

ADA32124 Possible Transfer Functions

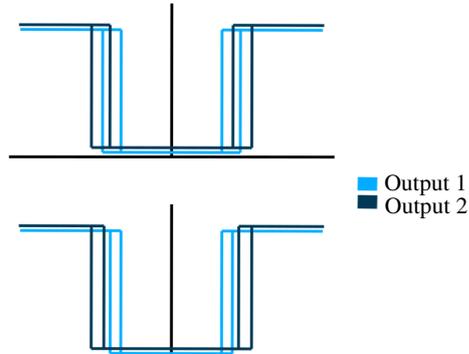

Operation

Direction of Magnetic Sensitivity

As an applied magnetic field varies in intensity, the digital outputs will turn on and off. Unlike Hall effect or other sensors, the direction of sensitivity is in the plane of the package. The diagrams below show two permanent magnet orientations that will activate the sensor in the direction of sensitivity:


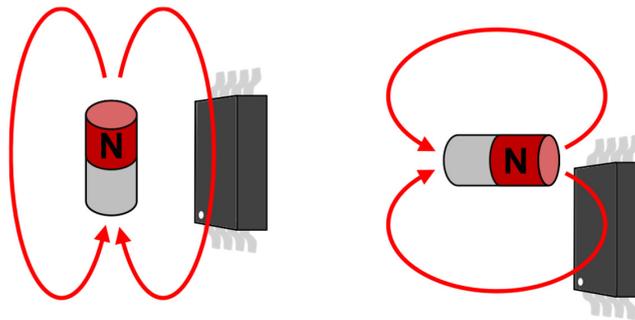


Figure 1. Direction of magnetic sensitivity.

ADA-Series sensors are “omnipolar,” meaning the outputs turn ON when a magnetic field of either magnetic polarity is applied.

Normal Operation in Large Magnetic Field

Unlike lower-performance sensors, ADA-Series sensors cannot be disturbed by large magnetic fields. The parts operate normally with correct output states even in the presence of magnetic fields up to 1400 mT (1114 kA/m).

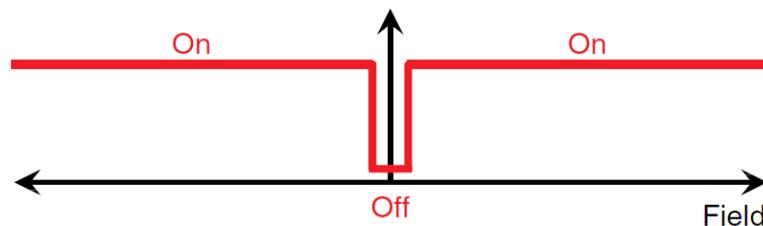

ADA-Series Advanced Magnetic Switches

Double-Switch-Proof Magnetic Field Detection

Ordinary sensors detect just one axis of the field. In the figure below, the sensor is in a location where the horizontal field component is zero. Therefore as the sensor travels from left to right, the magnitude of horizontal field component will increase and decrease, potentially switching multiple times. This can be a problem in applications such as cylinder position sensing.

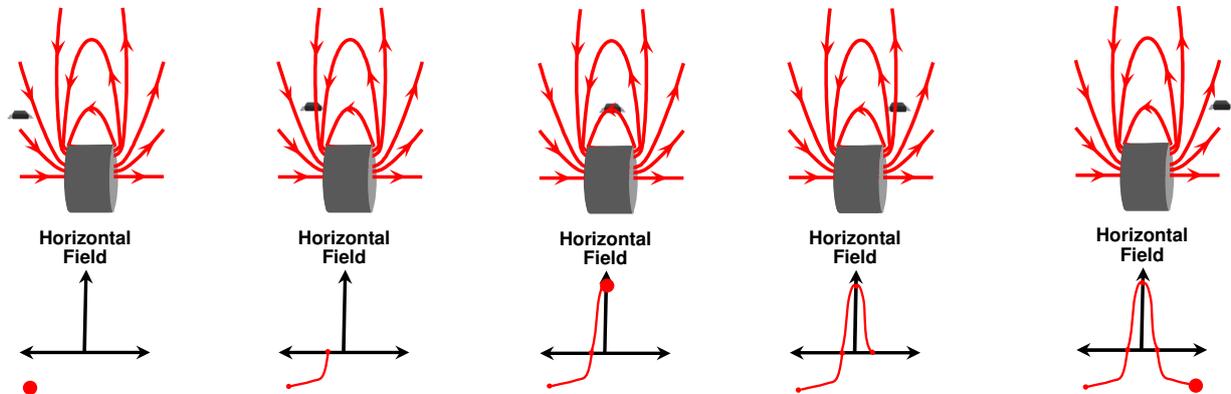


Figure 2. Ordinary sensors can double-switch because they detect only one axis of the magnetic field.

The ADA-Series sensor elements use a unique omnidirectional technology that makes them immune to double-switching. The sensors detect the vertical and horizontal field components, so the detected field increases monotonically the closer the magnet is to the center of the magnet. Therefore, ADA-Series sensors detect the magnet's arrival and departure with only a single on/off cycle.

ADA-Series Advanced Magnetic Switches

Application Information

External Pull-Up Resistors

Outputs are logic low when the sensor is activated. The outputs are open-collector and should have external pull-up resistors. For microcontroller interfaces, the microcontroller's input pull-up resistors can be activated.

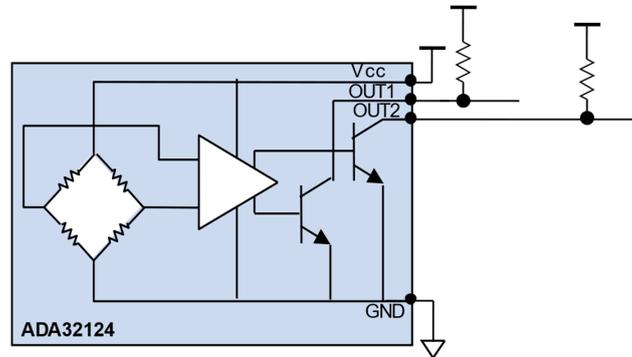


Figure 3. Typical minimum connections for normal operation. Pullup resistors should be used. The outputs can each sink at least 20 mA.

Precision Window Comparator

This simple circuit illustrates how transistor logic can be used to indicate a magnetic field between the two switching points:

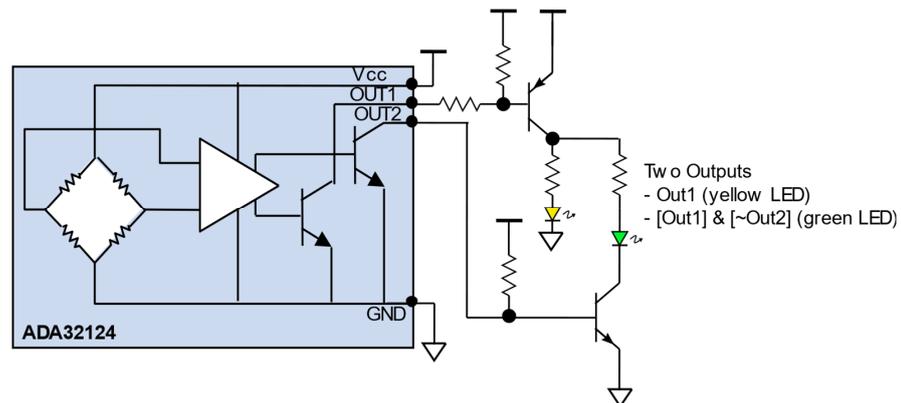


Figure 4. External BJTs or FETs can be used to create a window switching output. The green LED will turn on when Out1 is on but Out2 is off.

ADA-Series Advanced Magnetic Switches

Typical Performance Graphs

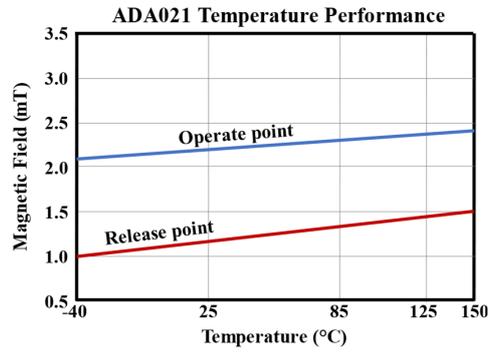


Figure 5. Typical temperature performance for ADA021 sensors. The performance is uniform across specifications.


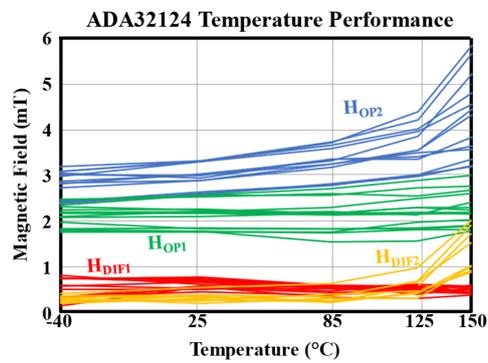


Figure 6. Typical temperature performance for ADA32124 sensors. Data from nine unique parts from three different lots is shown.


ADA-Series Advanced Magnetic Switches

3 mm x 3 mm MSOP8 Package (-00E suffix)

Dimensions in inches (mm); scale = approx. 5X

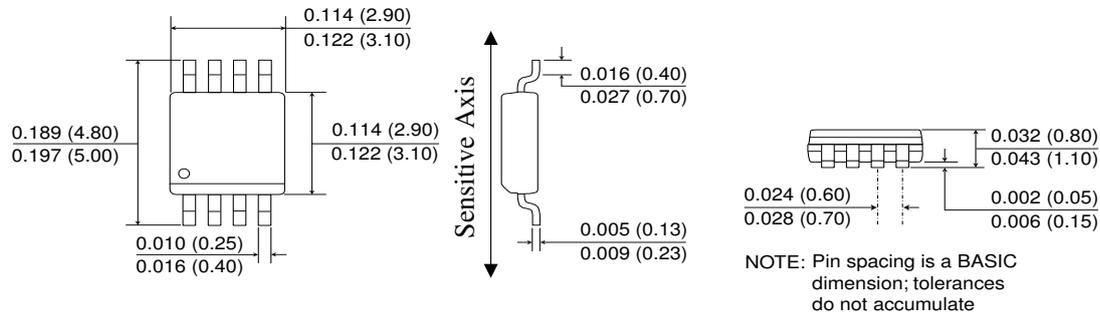

2.5 mm x 2.5 mm DFN6 Package (-10 suffix)

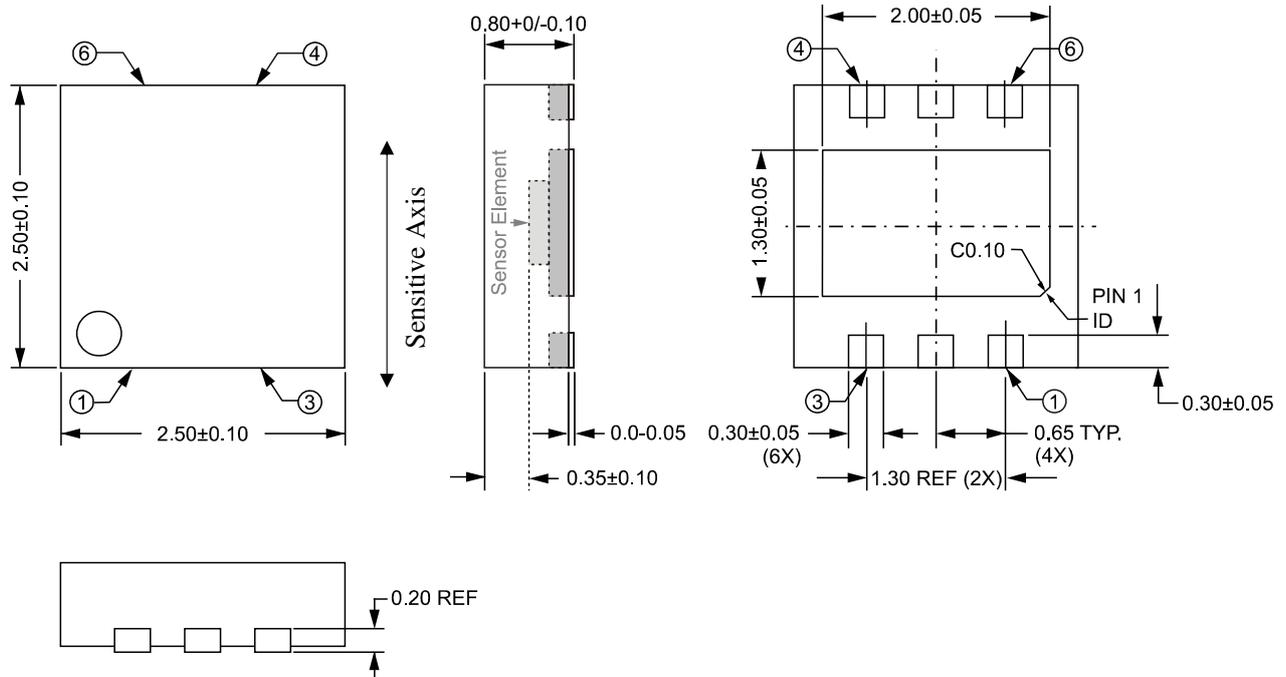


Notes:

- Dimensions in millimeters.
- Soldering profile per JEDEC J-STD-020C, MSL 1.



ADA-Series Advanced Magnetic Switches

Part Numbering

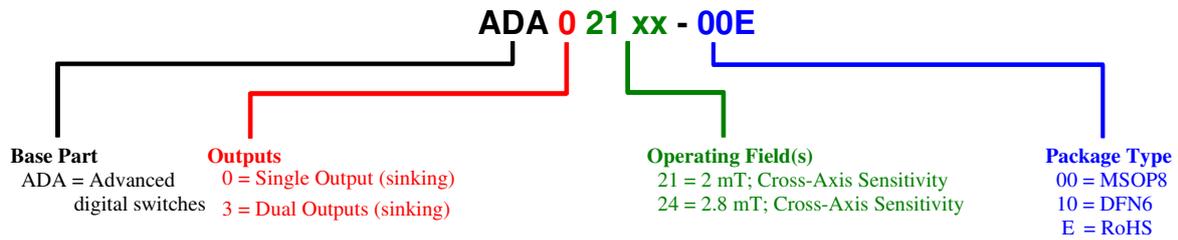

Available Parts


Part Number	Outputs	Operate Point (typ.)	Release Point (typ.)	Package
ADA021-00E	1	2 mT	1 mT	MSOP8
ADA021-10E				DFN6
ADA32124-00E	2	2 mT; 2.8 mT	1 mT; 2.2 mT	MSOP8

Pinout	ADA021-00E	ADA021-10E	ADA32124-00E
Pin 1	Vcc	Vcc	Vcc
Pin 2	NC	NC	NC
Pin 3	NC	NC	NC
Pin 4	NC	GND	NC
Pin 5	GND	NC	GND
Pin 6	NC	Out	NC
Pin 7	NC	-	Out 1
Pin 8	Out	-	Out 2

ADA-Series Advanced Magnetic Switches

Evaluation Board

An evaluation board allows easy testing an ADA32124-00E two-threshold sensor. The board includes the sensor and LEDs to indicate the state of the two outputs. Circuitry similar to Figure 4 creates a window switching output. The board can be powered with a 4.5 to 30-volt supply:



ADA32124-00E-EVB02

1" x 0.12" (25 mm x 3 mm)

Bare Circuit Boards

NVE offers several bare circuit boards for easy connections to surface-mount sensors. Popular PCBs are shown below (images are two times actual size):



AG915-06:

0.25" (6 mm) octagonal
for MSOP8



AG918-06 (standard) / AG919-06 (cross-axis):
2" x 0.25" (50 mm x 6 mm) for MSOP8



AG035-06:

1.57" x 0.25" (40 mm x 6 mm) for DFN6

ADA-Series Advanced Magnetic Switches

Revision History

SB-00-043

February 2025

Change

- Initial release.



We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
